SC(JGY), SC(JGB)

Imported Spy Triangle, Bell Mouth Copper Connecting Terminals
引进窥口三角型，喇叭口型铜接线端子

用途 Application

适用于标称截面1.5–1000mm² 电力电缆式电线的铜导体与电气设备的连接，特点，采用管料含铜量>99.9%的高纯T2铜管制造，长期工作温度–55℃–150℃，表面镀锡。

There products are suitable for the connection of copper conductors (section 1.5–1000mm²) in power cable with electronic equipment they are made of T2 copper tube containing nighter than and equal to 99.9% copper, tin coated and coated with tin. working temperature –55℃–150℃.

外型及安装尺寸 Dimension drawings

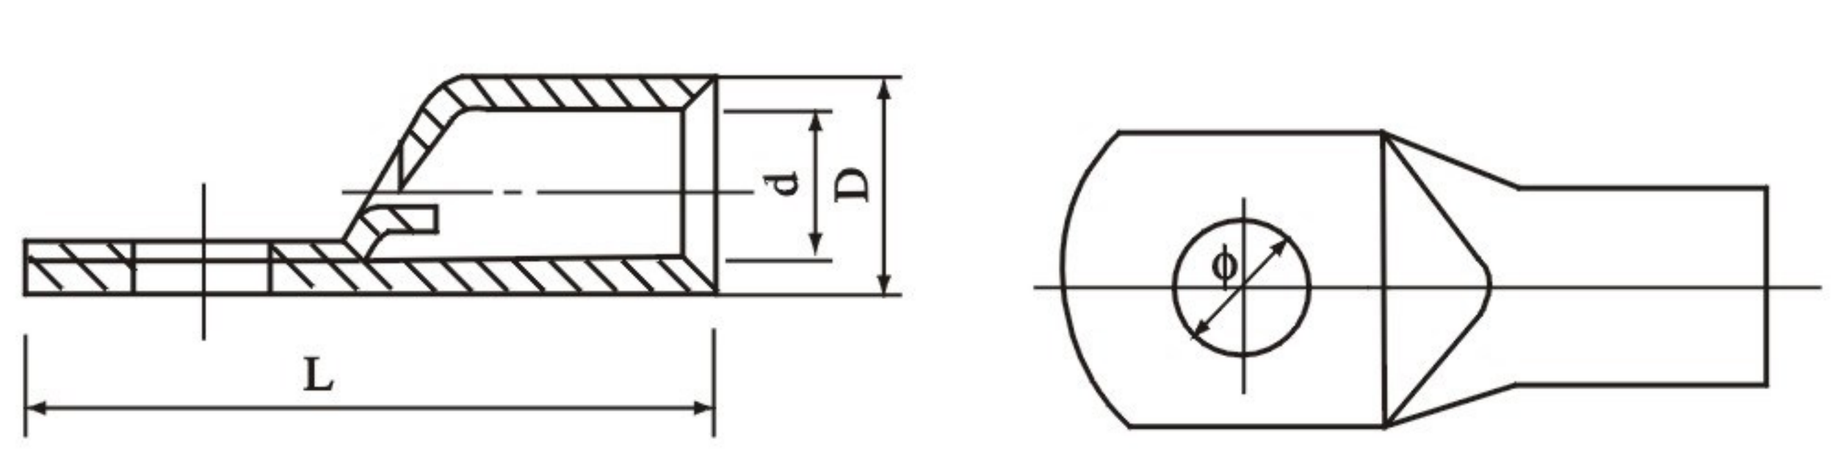

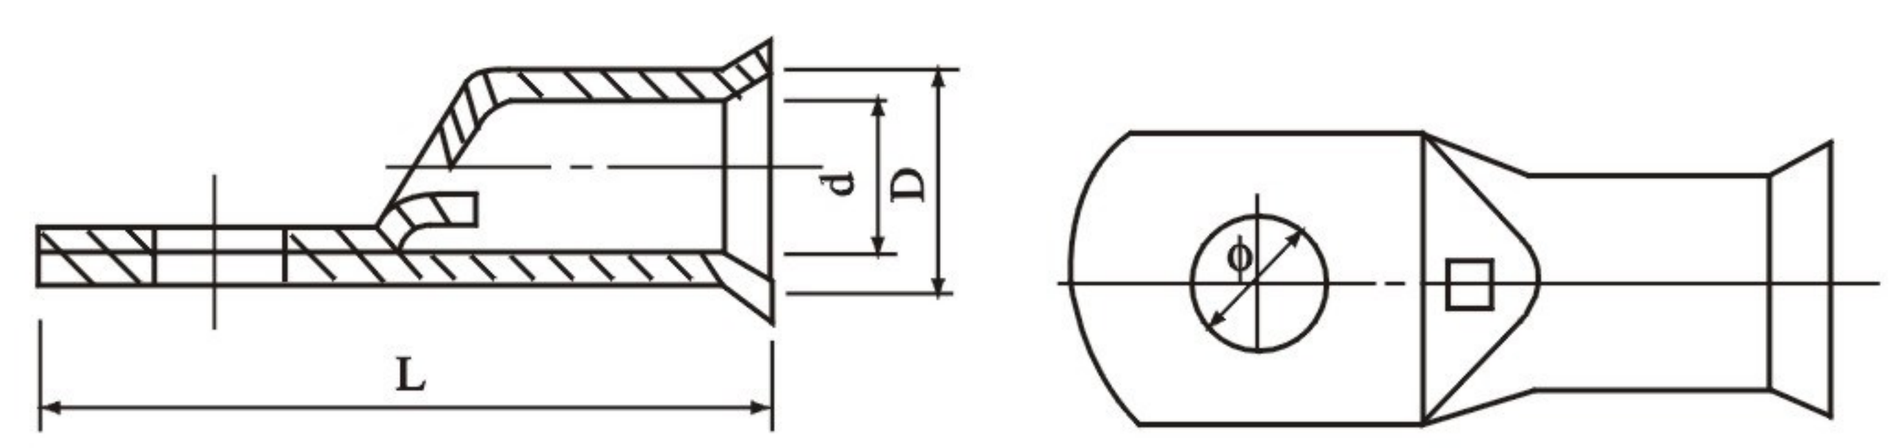

型号Type	Φ	D	d	L
SC(JGY)–1.5	Φ4.2, Φ5.2	3.5	1.8	18
SC(JGY)–2.5	Φ4.2, Φ5.2, Φ6.2	4	2.5	19
SC(JGY)–4	Φ5.2, Φ6.2	4.8	3.1	21
SC(JGY)–6	Φ5.2, Φ6.2, Φ8.2	5.5	3.8	24
SC(JGY)–10	Φ6.2, Φ8.2	6.8	4.8	25.5
SC(JGY)–16	Φ6.2, Φ8.2, Φ10.5	7.5	5.5	30.5
SC(JGY)–25	Φ6.2, Φ8.2, Φ10.5	9	7	34
SC(JGY)–335	Φ6.2, Φ8.2, Φ10.5, Φ12.5	10.5	8.2	38
SC(JGY)–50	Φ8.2, Φ10.5, Φ12.5	12.5	9.8	45
SC(JGY)–70	Φ8.2, Φ10.5, Φ12.5	14.5	11.5	50
SC(JGY)–95	Φ10.5, Φ12.5	17.5	13.8	55.5
SC(JGY)–120	Φ12.5, Φ16.5	19.5	15.5	63
SC(JGY)–150	Φ12.5, Φ16.5	21	16.5	71
SC(JGY)–185	Φ16.5	23.5	18.8	78
SC(JGY)–240	Φ16.5	26.5	21	92
SC(JGY)–300	Φ16.5, Φ20.5	30	24	102
SC(JGY)–400	Φ16.5, Φ20.5	34	26.5	113
SC(JGY)–500	Φ16.5, Φ20.5	38	30	123
SC(JGY)–630	Φ20.5	45	35	135
SC(JGY)–800	Φ22.5	50	39	170
SC(JGY)–1000	Φ22.5	56	44	200

型号Type	Φ	D	d	L
SC(JGB)–1.5	Φ4.2, Φ5.2	3.5	1.8	18
SC(JGB)–2.5	Φ4.2, Φ5.2, Φ6.2	4	2.5	19
SC(JGB)–4	Φ5.2, Φ6.2	4.8	3.1	21
SC(JGB)–6	Φ5.2, Φ6.2, Φ8.2	5.5	3.8	24
SC(JGB)–10	Φ6.2, Φ8.2	6.8	4.8	25.5
SC(JGB)–16	Φ6.2, Φ8.2, Φ10.5	7.5	5.5	30.5
SC(JGB)–25	Φ6.2, Φ8.2, Φ10.5	9	7	34
SC(JGB)–335	Φ6.2, Φ8.2, Φ10.5, Φ12.5	10.5	8.2	38
SC(JGB)–50	Φ8.2, Φ10.5, Φ12.5	12.5	9.8	45
SC(JGB)–70	Φ8.2, Φ10.5, Φ12.5	14.5	11.5	50
SC(JGB)–95	Φ10.5, Φ12.5	17.5	13.8	55.5
SC(JGB)–120	Φ12.5, Φ16.5	19.5	15.5	63
SC(JGB)–150	Φ12.5, Φ16.5	21	16.5	71
SC(JGB)–185	Φ16.5	23.5	18.8	78
SC(JGB)–240	Φ16.5	26.5	21	92
SC(JGB)–300	Φ16.5, Φ20.5	30	24	102
SC(JGB)–400	Φ16.5, Φ20.5	34	26.5	113
SC(JGB)–500	Φ16.5, Φ20.5	38	30	123
SC(JGB)–630	Φ20.5	45	35	135
SC(JGB)–800	Φ22.5	50	39	170
SC(JGB)–1000	Φ22.5	56	44	200

GTY

Imported Copper Connecting Tube
引进铜接线管

用途 Application

适用于配电装置中各种圆型、半圆扇型电线电力电缆之间的连接，采用管料含铜量≥99.9%的高纯T2铜管制造，表面镀锡。

These products are applicable for the connection of the circular wire, hemicyde wire with power supply cable in distribution equipment. They are made of T2 copper tube containing nighter than and equal to 99.9% copper, tin coated.

外型及安装尺寸 Dimension drawings

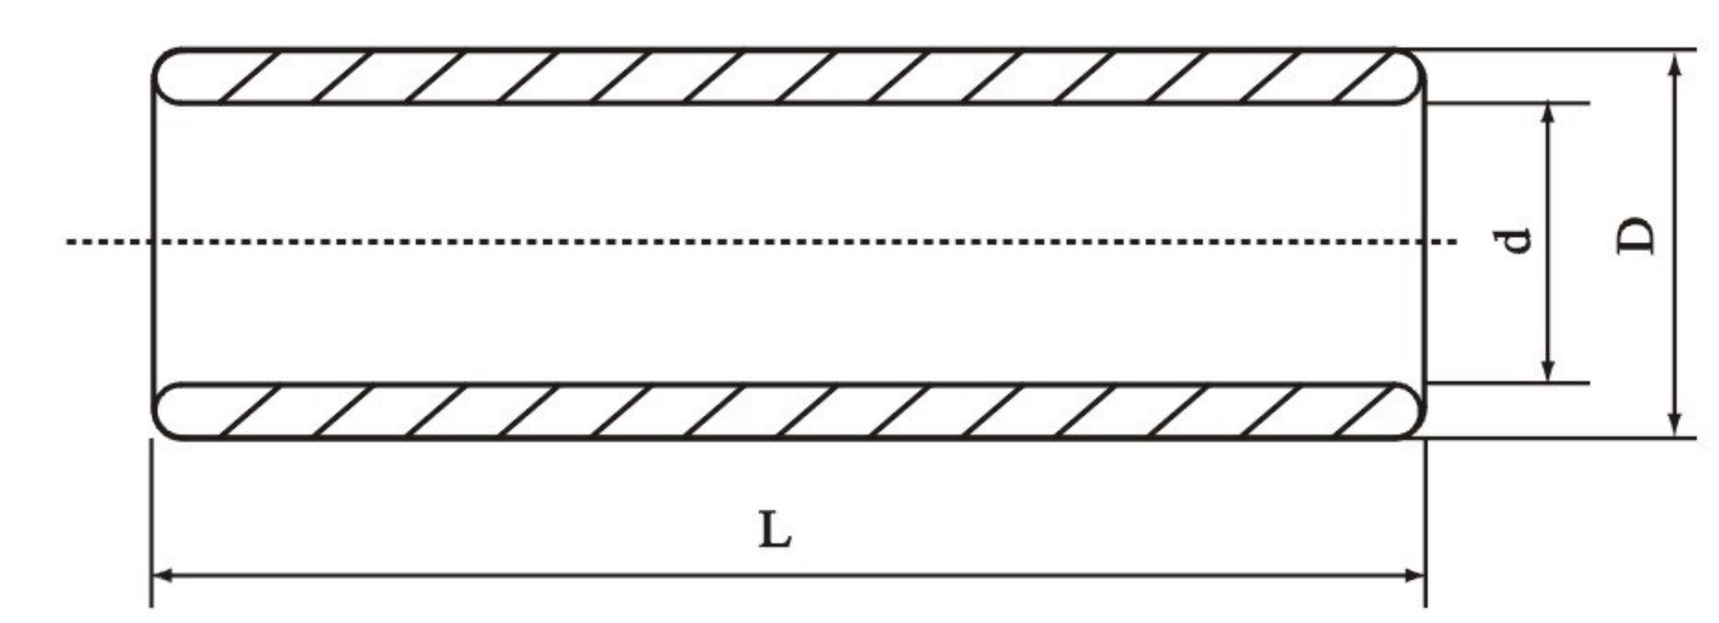

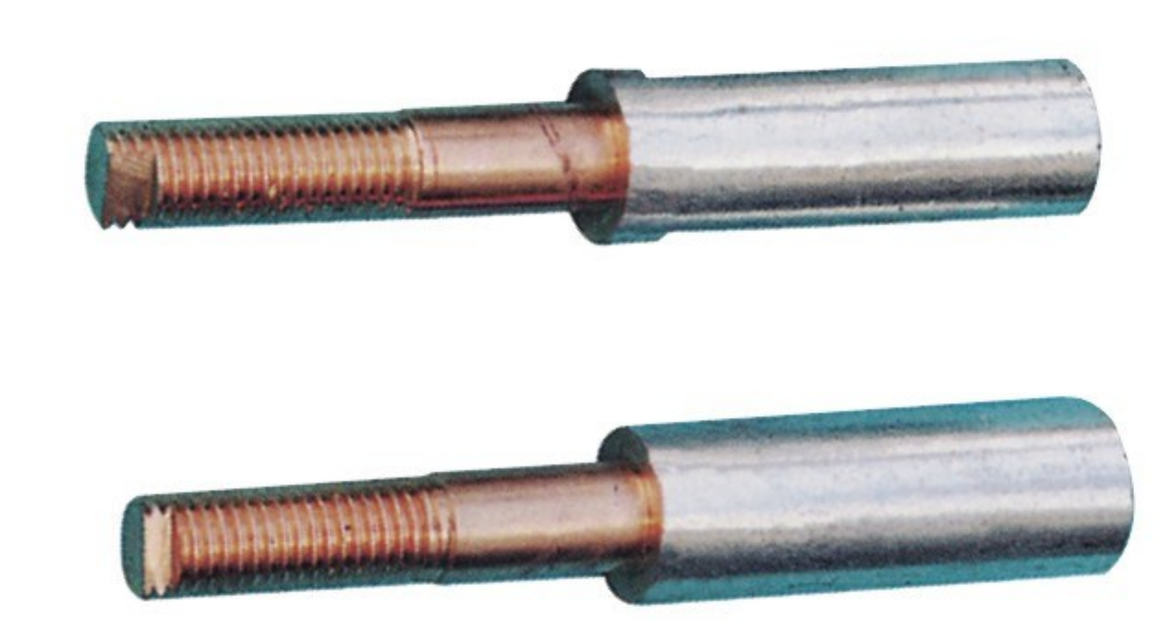

电缆终端接头Cable terminal joint

型号Type	D	d	L
GTY–1.5	3.7	1.8	20
GTY–2.5	4	2.5	20
GTY–4	4.8	3.1	20
GTY–5.5	5.5	3.8	25
GTY–10	6.8	4.8	30
GTY–16	7.5	5.5	35
GTY–25	9	7	40
GTY–35	10.5	8.2	45
GTY–50	12.5	9.8	50
GTY–70	14.5	11.5	55
GTY–95	17.5	13.5d	60
GTY–120	19.5	15	65
GTY–150	21	16.5	70
GTY–185	23.5	18.5	75
GTY–240	26.5	21	80
GTY–300	30	24	85
GTY–400	34	27	90
GTY–500	38	30	100
GTY–630	45	35	110
GTY–800	50	39	150
GTY–1000	56	44	170